
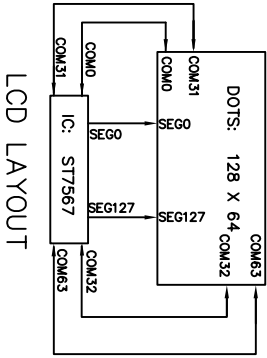


Please sign and stamp to us:



Version	Change the content?	Date?	Signature
00	FIRSTISSUE	2016.10.17	
01	MODIFY FOR FSTN,LED FOR WHITE	2017.02.15	
02	ADD BoxHeader	2017.05.18	

Display side

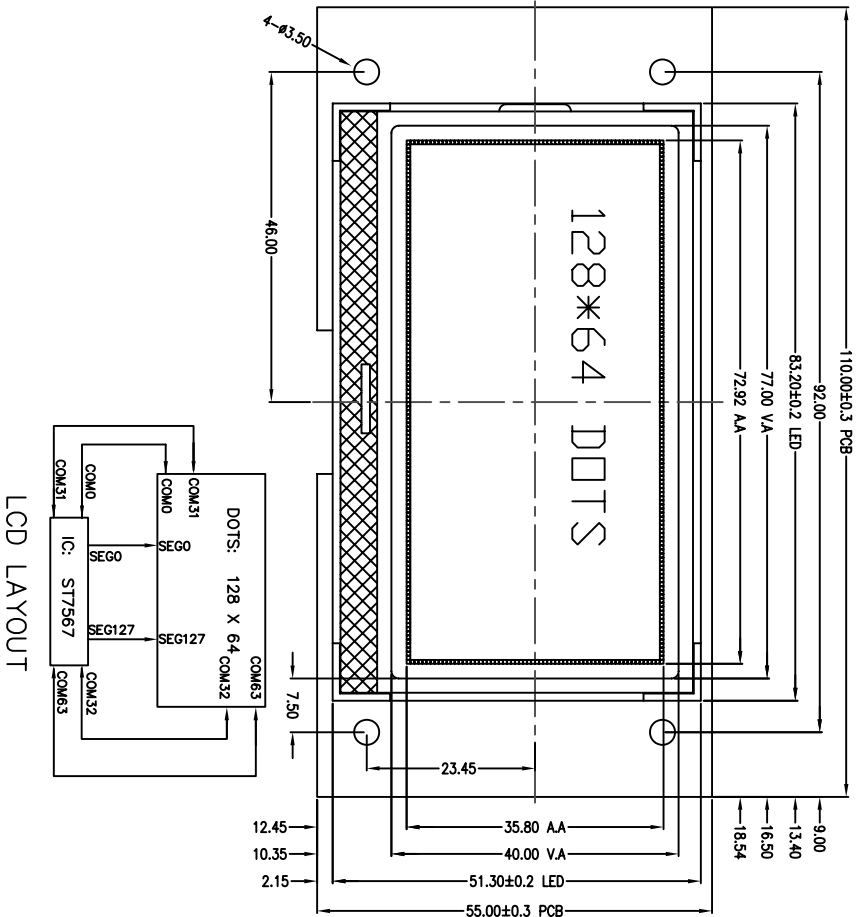

SPECIFICATIONS:


1. DRIVE METHOD: 1/65DUTY, 1/9BIAS, VDD=3.3V.
2. VIEWING ANGLE: 6 0'CLOCK.
3. DISPLAY TYPE: FSTN,TRANSMISSIVE/POSITIVE.
4. OPERATING TEMP: -10 TO 60°C.
5. STORAGE TEMP: -20 TO 70°C.
6. CONNECTION: COG+FPIC
7. IC: ST7567.
8. BACKLIGHT: WHITE SIDE 4pcs.

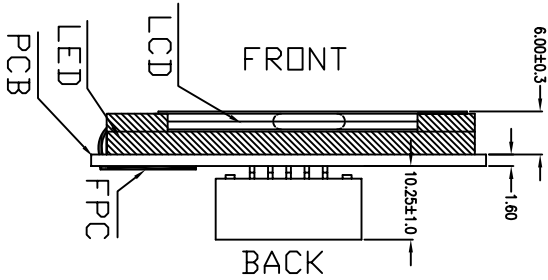

DOTS DETAIL
SCALE 10:1

??PCB???

Back side

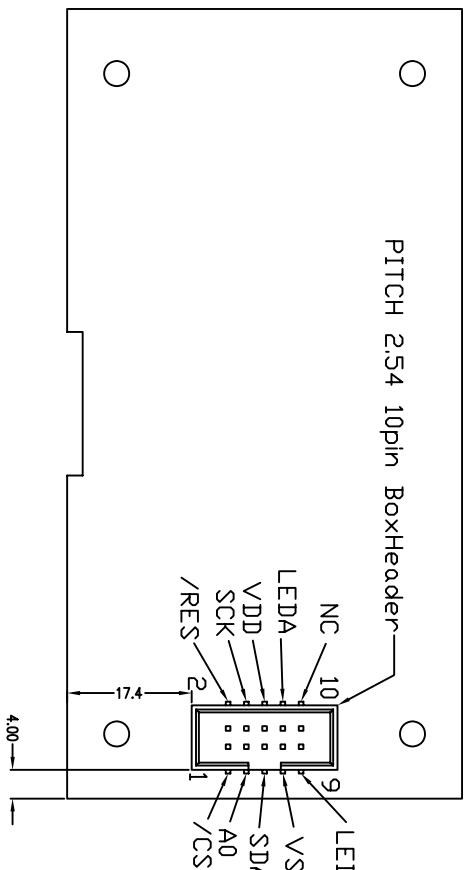

Shenzhen Xingyube Electronics Co., Ltd

LCM project

SCALE: FIT	
PAGE? 1 OF 1	
TOL: 0.3mm	
SCALE 1:1 UNIT? mm	MODEL NUMBER:
APP? DAT:	JGG12864K00-45
CHK? DAT:	
DW? LWD	DAT: 2016.10.17
	DO NOT SCALE THIS DRAWING
	PROJECTION

C/D